

AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT			1. CONTRACT ID CODE J	PAGE OF PAGES 1   3
2. AMENDMENT/MODIFICATION NO. 0007	3. EFFECTIVE DATE 01-Apr-2003	4. REQUISITION/PURCHASE REQ. NO. W81G67-2212-3595		5. PROJECT NO.(If applicable)
6. ISSUED BY CONTRACTING DIVISION USAGE - ST PAUL 190 5TH STREET E ST PAUL MN 55101-1638	CODE DACW37	7. ADMINISTERED BY (If other than item 6) CONTRACTING DIVISION ATTN: BILL HURLEY PHONE: 651-290-5416 MN		CODE
8. NAME AND ADDRESS OF CONTRACTOR (No., Street, County, State and Zip Code)			X	9A. AMENDMENT OF SOLICITATION NO. DACW37-02-B-0015
			X	9B. DATED (SEE ITEM 11) 24-Feb-2003
				10A. MOD. OF CONTRACT/ORDER NO.
				10B. DATED (SEE ITEM 13)
CODE	FACILITY CODE			
<b>11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS</b>				
<input checked="" type="checkbox"/> The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offer <input checked="" type="checkbox"/> is extended, <input type="checkbox"/> is not extended.				
Offer must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended by one of the following methods: (a) By completing Items 8 and 15, and returning <u>1</u> copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.				
12. ACCOUNTING AND APPROPRIATION DATA (If required)				
<b>13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS. IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.</b>				
A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.				
B. THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(B).				
C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:				
D. OTHER (Specify type of modification and authority)				
E. IMPORTANT: Contractor <input type="checkbox"/> is not, <input type="checkbox"/> is required to sign this document and return _____ copies to the issuing office.				
14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.) This amendment changes specifications and drawings. Two drawings are added and attached. The bid opening time/date is changed to 2:00 PM local time 09 April 2003.				
Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.				
15A. NAME AND TITLE OF SIGNER (Type or print)			16A. NAME AND TITLE OF CONTRACTING OFFICER (Type or print)	
			TEL:	EMAIL:
15B. CONTRACTOR/OFFEROR	15C. DATE SIGNED	16B. UNITED STATES OF AMERICA		16C. DATE SIGNED
_____ (Signature of person authorized to sign)		BY _____ (Signature of Contracting Officer)		

## SECTION SF 30 BLOCK 14 CONTINUATION PAGE

**SUMMARY OF CHANGES**

## SECTION 00010 - SOLICITATION CONTRACT FORM

1. The required response (bid opening) date/time has changed from 08-Apr-2003 02:00 PM to 09-Apr-2003 02:00 PM local time.

**The following specifications have been amended:**

1. Section 01330, Submittal Register: Delete the "GOVERNMENT FIELD OFFICE" submittal for section 01500.
2. Section 01500, Table of Contents and in the text of the section: Change the title of paragraph 2.2 from "GOVERNMENT FIELD OFFICE" to "NOT USED" and delete the entire text of that paragraph and delete all sub paragraphs of paragraph 2.2.
3. Section 02300. Add the following paragraph after paragraph 3.3.1:  
 "3.3.2 Additional Permanent Stockpile Area Not Shown on Drawings  
 An additional permanent stockpile area, not indicated on the drawings, is located just north of Ponding Area 2A. All excavated material from Ponding Area 2A, meeting the requirements indicated in the above paragraphs, shall be placed in this stockpile area. Material shall be placed as indicated in the above paragraph pertaining to placement requirements. The sketch at the end of this section shows the layout, dimensions, top elevation, and side slopes of the stockpile area. The sketch also shows work limits and access to the area from the adjacent dirt road. The actual work limits and stockpile boundaries shall be field located by the Contractor based on this information and approved by the Contracting Officer prior to using the area."
4. Section 02300. Insert the attached sketch, showing the additional permanent stockpile area, at the end of section 02300.
5. Section 02316, after paragraph 2.1.4, add the following paragraph:  
 "2.1.5 Aggregate Bedding Material  
 Aggregate bedding material shall be a well graded mineral product meeting the following gradation requirements:  


<u>Sieve Size</u>	<u>Percent Passing</u>
3/4 inch	100
3/8 inch	90-100
No. 4	35-75
No. 200	0-8
6. Section 02316, paragraph 3.2.2. Change this paragraph to read as follows: "Aggregate bedding material shall be of the gradation indicated in this section and shall conform to the shape and thickness as indicated on the drawings. Aggregate bedding material shall be placed and compacted with manual tampers. Initial backfill material shall be placed and compacted with manual tampers to a height above the pipe necessary to prevent damage, but not less than one foot. The backfill shall be brought up evenly on both sides of the pipe for the full length of the pipe. Care shall be taken to ensure thorough compaction of the aggregate bedding material under the haunches of the pipe. Aggregate bedding material and initial backfill material shall be compacted to the densities indicated in section 02630."
7. Section 02316, paragraph 3.3.2. Add the following sentence to the beginning of the paragraph: "The field density tests required by this paragraph apply to the aggregate bedding material, the initial backfill, and the final backfill."

8. Section 02630, paragraph 3.7.4.1, after sub paragraph c., add the following sub paragraph: “d. Aggregate Bedding Material, density shall not be less than 95% of maximum density.”
9. Section 05500, paragraph 2.2. Change this paragraph to read as follows: ”Studs shall be of the length and diameter shown. Steel studs shall be in accordance with ASTM A 325.”
10. Section 05615, paragraph 2.3.3.2. Change this paragraph to read as follows: “Stoplog frames, stoplog grooves, and frame sill plates shall be fabricated from structural steel and shall conform to ASTM A 572, Grade 50. All structural steel shall be galvanized after fabrication.”
11. Section 05615, paragraph 2.3.3.4. Change the title of this paragraph to “Not Used” and delete all the text of this paragraph.
12. Section 05615, paragraph 2.3.3.8. Change this paragraph to read as follows: “Welded shear studs shall meet the requirements as indicated for studs in section 05500.”
13. Section 05615, paragraph 2.4.7.2. Change the title of this paragraph to “Not Used” and delete all the text of this paragraph.
14. Section 15131, paragraph 2.6, Add additional sentences to the end of the paragraph as follows: "Crane shall be similar to Thern Model 5124M2 or equal. Provide pedestal base to match the crane."

**The following drawings have been amended:**


15. DRAWING NUMBER R-P-WB-64/094, coordinate G1, DETAIL D.  
Change “LADDER” to “EXISTING LADDER”.  
Change “GRAB BAR” to “EXISTING GRAB BAR”.  
Change “24” (GRATING)” to “EXISTING 24” GRATING”.  
Change “BEAM (2” TYP.)” to “EXISTING BEAM (2” TYP.)”.  
Change “HINGED” to “EXISTING HINGE”.  
Beneath the detail title, add the following: “NOTE: THE PURPOSE OF THIS DETAIL IS TO SHOW EXISTING CONDITIONS. NO PERMANENT MODIFICATIONS TO THE GRATING, LADDER, OR GRAB BAR ARE REQUIRED.”
16. DRAWING NUMBER R-P-WB-64/100, DETAIL SLF, DETAIL FSP, and DETAIL SLG. Delete “STAINLESS STEEL” from all the notations in these three details.
17. DRAWING NUMBER R-P-WB-64/054. Add the attached detail titled “DETAIL D, AGGREGATE PIPE BEDDING AND BACKFILL” to this drawing.

(End of Summary of Changes)

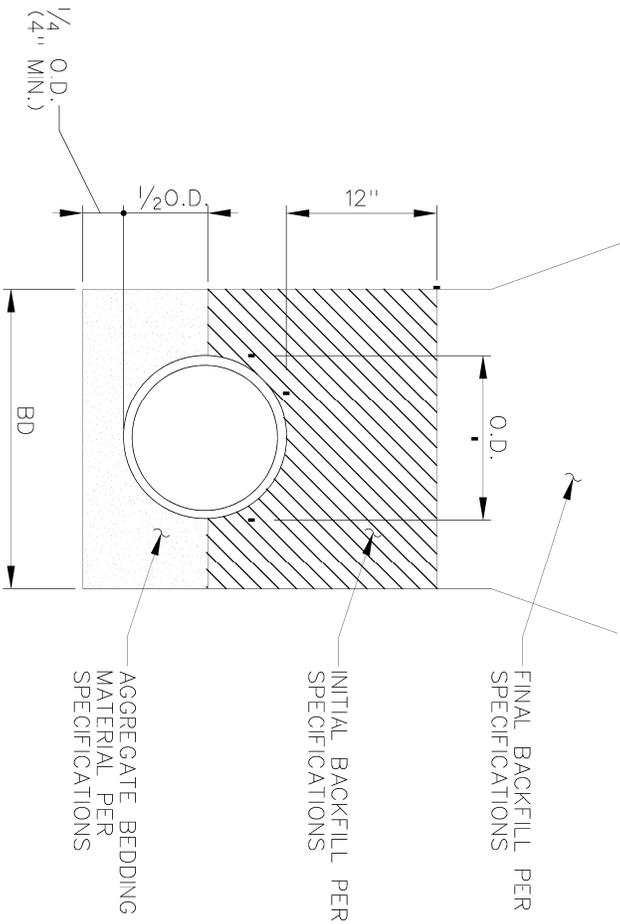

- NOTES:**
1.  $BD = O.D. + 24"$

**DETAIL**  
**AGGREGATE PIPE BEDDING**  
**AND BACKFILL**  
 SCALE: NONE



1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	G	H	I
A	B	C	D	E	F	G	H	I	A	B	C	D	E	F	G	H	I

8-11  
OF

WAHPETON STAGE 1  
**FLOOD CONTROL**  
 STORM SEWER DETAIL

DEPARTMENT OF THE ARMY  
 ST. PAUL, MINNESOTA  
 CORPS OF ENGINEERS  
 ST. PAUL DISTRICT

DESIGNED:	SCALE:	DATE:
CHECKED:	AS SHOWN	MONTH YEAR
DRAWN:	CADD FILE NAME:	
	EMDETAIL.DGN	
DESIGNED:	SOL. NO.:	
	DACW37-02-B-0000	
CHECKED:	AE APPROVING OFFICIAL:	

Symbol	Description	Date	Appr.



